


Insertar valores en una tabla de una base de datos en MySQL con PowerShell

[crayon-6a9d57a97a38d495612430/]

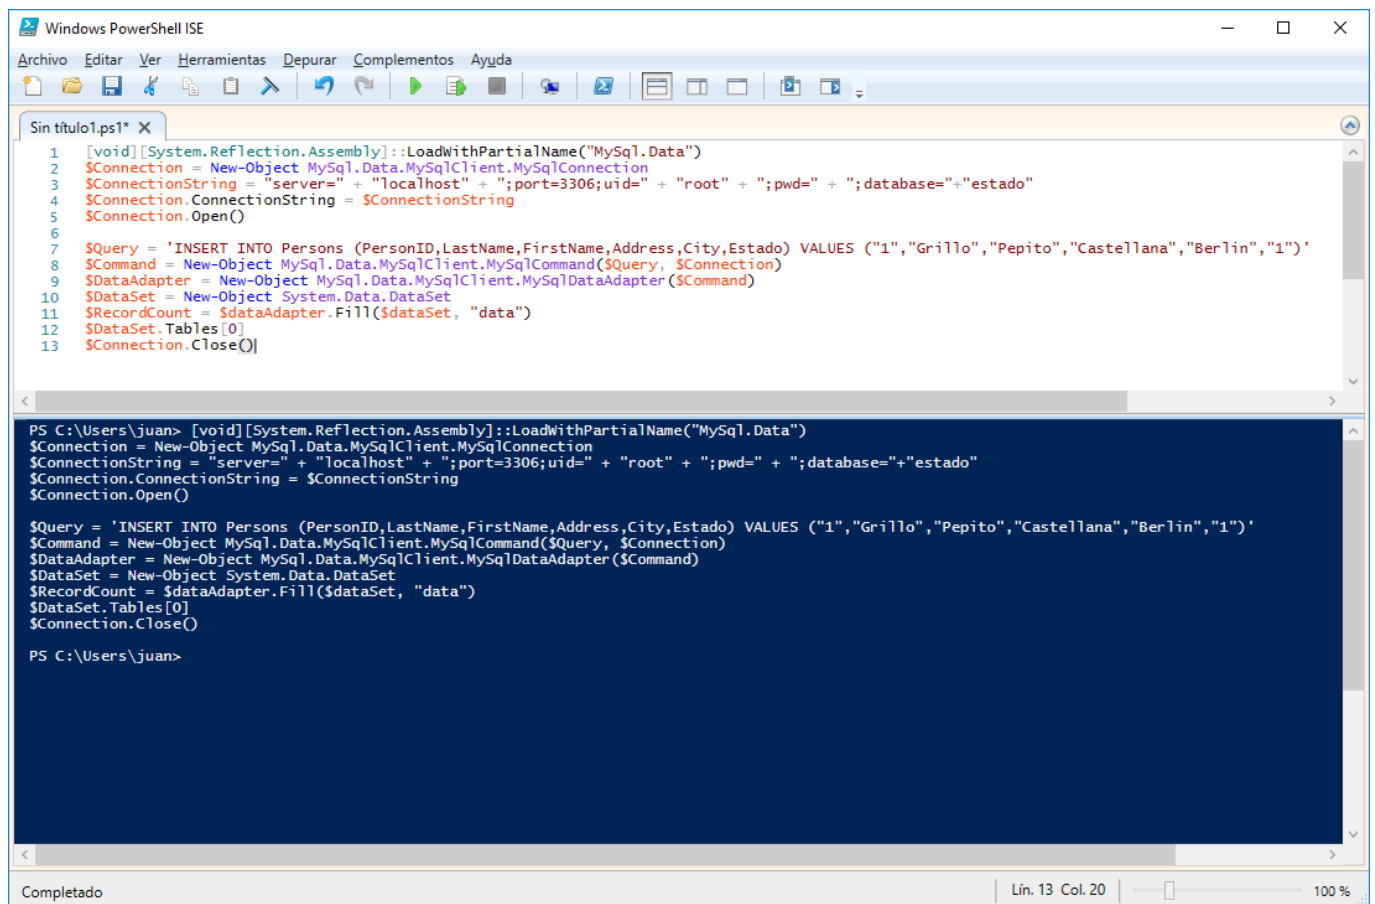

```
Sin titulo1.ps1* X
1 [void][System.Reflection.Assembly]::LoadWithPartialName("MySQL.Data")
2 $Connection = New-Object MySQL.Data.MySqlClient.MySqlConnection
3 $ConnectionString = "server=" + "localhost" + ";port=3306;uid=" + "root" + ";pwd=" + ";database="+ "estado"
4 $Connection.ConnectionString = $ConnectionString
5 $Connection.Open()
6
7 $Query = 'INSERT INTO Persons (PersonID,LastName,FirstName,Address,City,Estado) VALUES ("1","Grillo","Pepito","Castellana","Berlin","1")'
8 $Command = New-Object MySQL.Data.MySqlClient.MySqlCommand($Query, $Connection)
9 $DataAdapter = New-Object MySQL.Data.MySqlClient.MySqlDataAdapter($Command)
10 $DataSet = New-Object System.Data.DataSet
11 $RecordCount = $DataAdapter.Fill($DataSet, "data")
12 $DataSet.Tables[0]
13 $Connection.Close()
```

```
PS C:\Users\juan> [void][System.Reflection.Assembly]::LoadWithPartialName("MySQL.Data")
$Connection = New-Object MySQL.Data.MySqlClient.MySqlConnection
$ConnectionString = "server=" + "localhost" + ";port=3306;uid=" + "root" + ";pwd=" + ";database="+ "estado"
$Connection.ConnectionString = $ConnectionString
$Connection.Open()

$Query = 'INSERT INTO Persons (PersonID,LastName,FirstName,Address,City,Estado) VALUES ("1","Grillo","Pepito","Castellana","Berlin","1")'
$Command = New-Object MySQL.Data.MySqlClient.MySqlCommand($Query, $Connection)
$DataAdapter = New-Object MySQL.Data.MySqlClient.MySqlDataAdapter($Command)
$DataSet = New-Object System.Data.DataSet
$RecordCount = $DataAdapter.Fill($DataSet, "data")
$DataSet.Tables[0]
$Connection.Close()

PS C:\Users\juan>
```

Completado | Lín. 13 Col. 20 | 100 %