


Ver valores insertados en una tabla de una base de datos en MySQL con PowerShell

[crayon-6a9d683f79d9b279125003/]

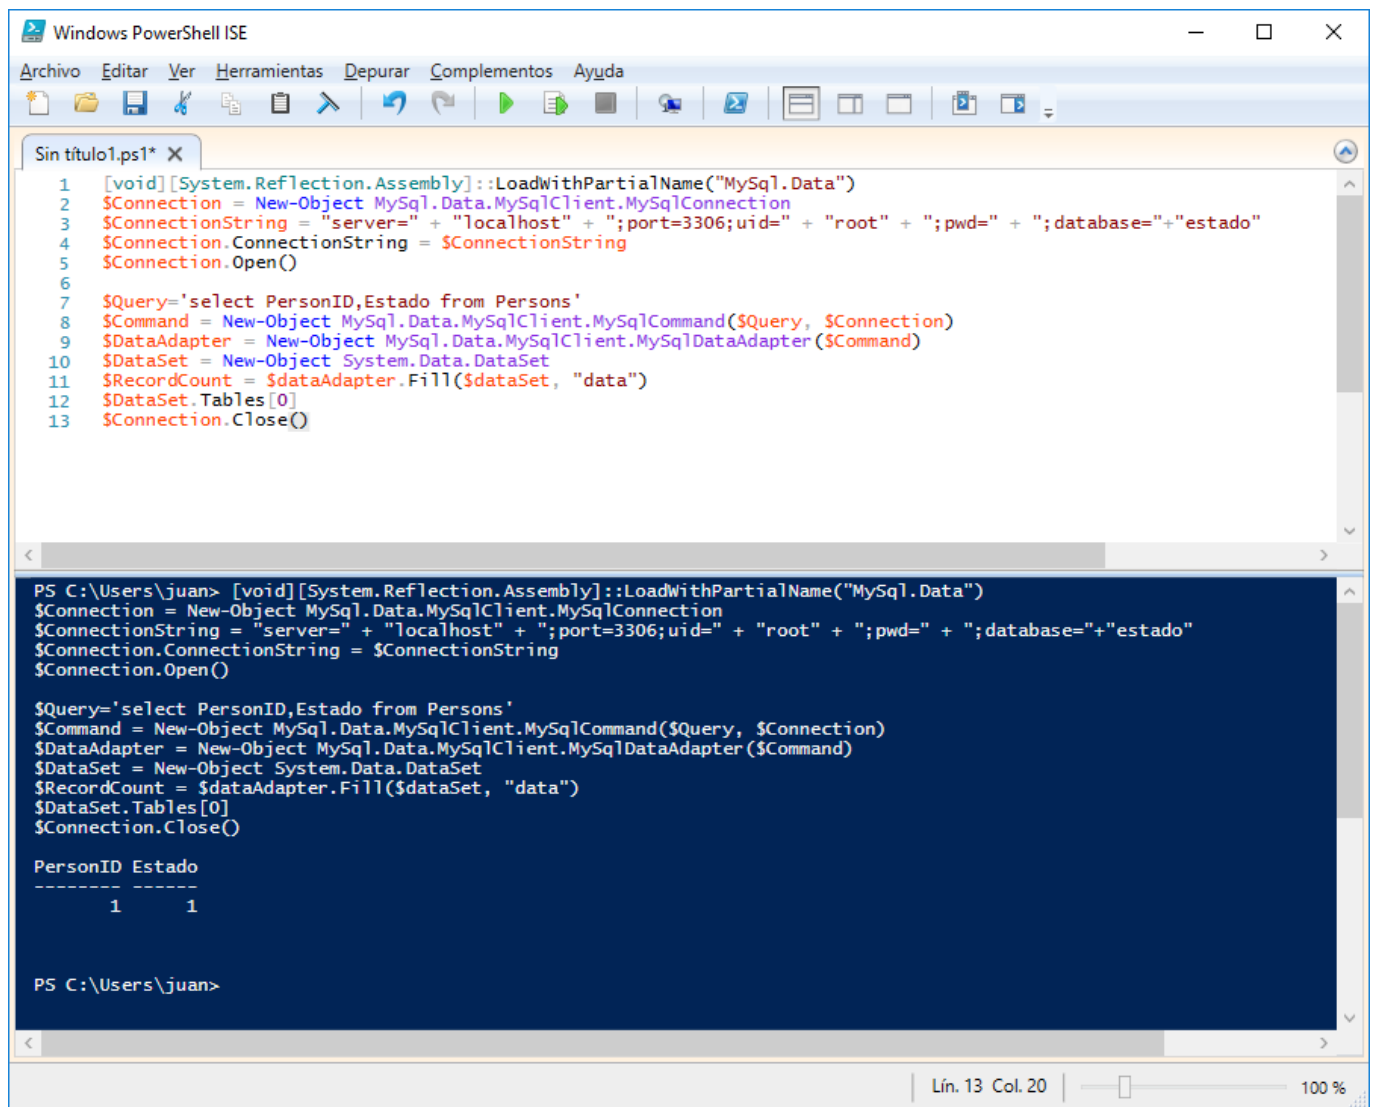

```
Sin título1.ps1* X
1 [void][System.Reflection.Assembly]::LoadWithPartialName("MySQL.Data")
2 $Connection = New-Object MySQL.Data.MySqlClient.MySqlConnection
3 $ConnectionString = "server=" + "localhost" + ";port=3306;uid=" + "root" + ";pwd=" + ";database="+"estado"
4 $Connection.ConnectionString = $ConnectionString
5 $Connection.Open()
6
7 $Query='select PersonID,Estado from Persons'
8 $Command = New-Object MySQL.Data.MySqlClient.MySqlCommand($Query, $Connection)
9 $DataAdapter = New-Object MySQL.Data.MySqlClient.MySqlDataAdapter($Command)
10 $DataSet = New-Object System.Data.DataSet
11 $RecordCount = $DataAdapter.Fill($DataSet, "data")
12 $DataSet.Tables[0]
13 $Connection.Close()
```

```
PS C:\Users\juan> [void][System.Reflection.Assembly]::LoadWithPartialName("MySQL.Data")
$Connection = New-Object MySQL.Data.MySqlClient.MySqlConnection
$ConnectionString = "server=" + "localhost" + ";port=3306;uid=" + "root" + ";pwd=" + ";database="+"estado"
$Connection.ConnectionString = $ConnectionString
$Connection.Open()

$Query='select PersonID,Estado from Persons'
$Command = New-Object MySQL.Data.MySqlClient.MySqlCommand($Query, $Connection)
$DataAdapter = New-Object MySQL.Data.MySqlClient.MySqlDataAdapter($Command)
$DataSet = New-Object System.Data.DataSet
$RecordCount = $DataAdapter.Fill($DataSet, "data")
$DataSet.Tables[0]
$Connection.Close()

PersonID Estado
-----
1         1

PS C:\Users\juan>
```

Lín. 13 Col. 20 | 100 %