


Pasar parámetros en scripts de PowerShell

[crayon-6a9d66bcc68e7742965674/]

Ejemplos de ejecución del script

[crayon-6a9d66bcc68ed719458762/]

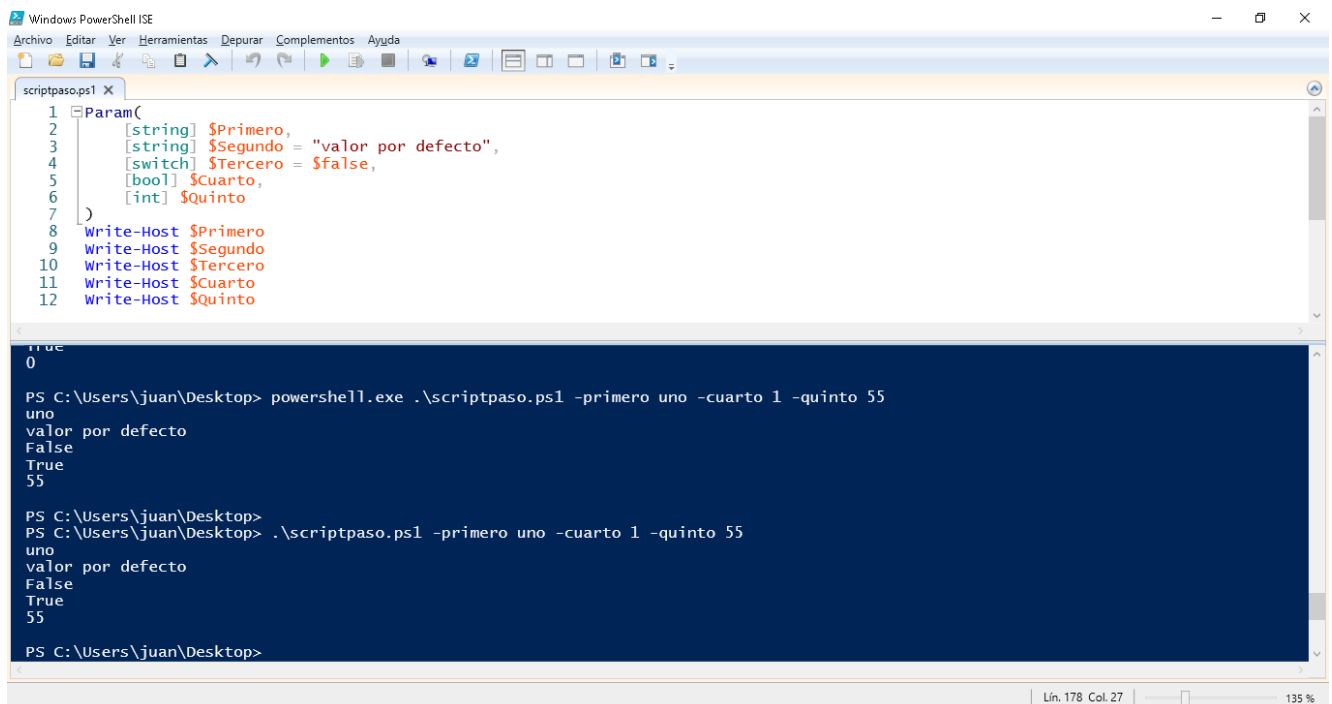

The screenshot displays the Windows PowerShell ISE interface. The top pane shows a script file named 'scriptpaso.ps1' with the following content:

```
1 Param(  
2     [string] $Primero,  
3     [string] $Segundo = "valor por defecto",  
4     [switch] $Tercero = $false,  
5     [bool] $Cuarto,  
6     [int] $Quinto  
7 )  
8 Write-Host $Primero  
9 Write-Host $Segundo  
10 Write-Host $Tercero  
11 Write-Host $Cuarto  
12 Write-Host $Quinto
```

The bottom pane shows the execution of the script from the command prompt. The first execution uses the default values, and the second execution uses the parameters -primero uno -cuarto 1 -quinto 55.

```
PS C:\Users\juan\Desktop> powershell.exe .\scriptpaso.ps1  
true  
0  
uno  
valor por defecto  
False  
True  
55  
  
PS C:\Users\juan\Desktop>  
PS C:\Users\juan\Desktop> .\scriptpaso.ps1 -primero uno -cuarto 1 -quinto 55  
uno  
valor por defecto  
False  
True  
55  
  
PS C:\Users\juan\Desktop>
```

The status bar at the bottom indicates 'Lín. 178 Col. 27' and a zoom level of '135 %'.