


Ejecutar un script en Internet Explorer utilizando PowerShell

[crayon-6a9d577e73ef6811379929/]

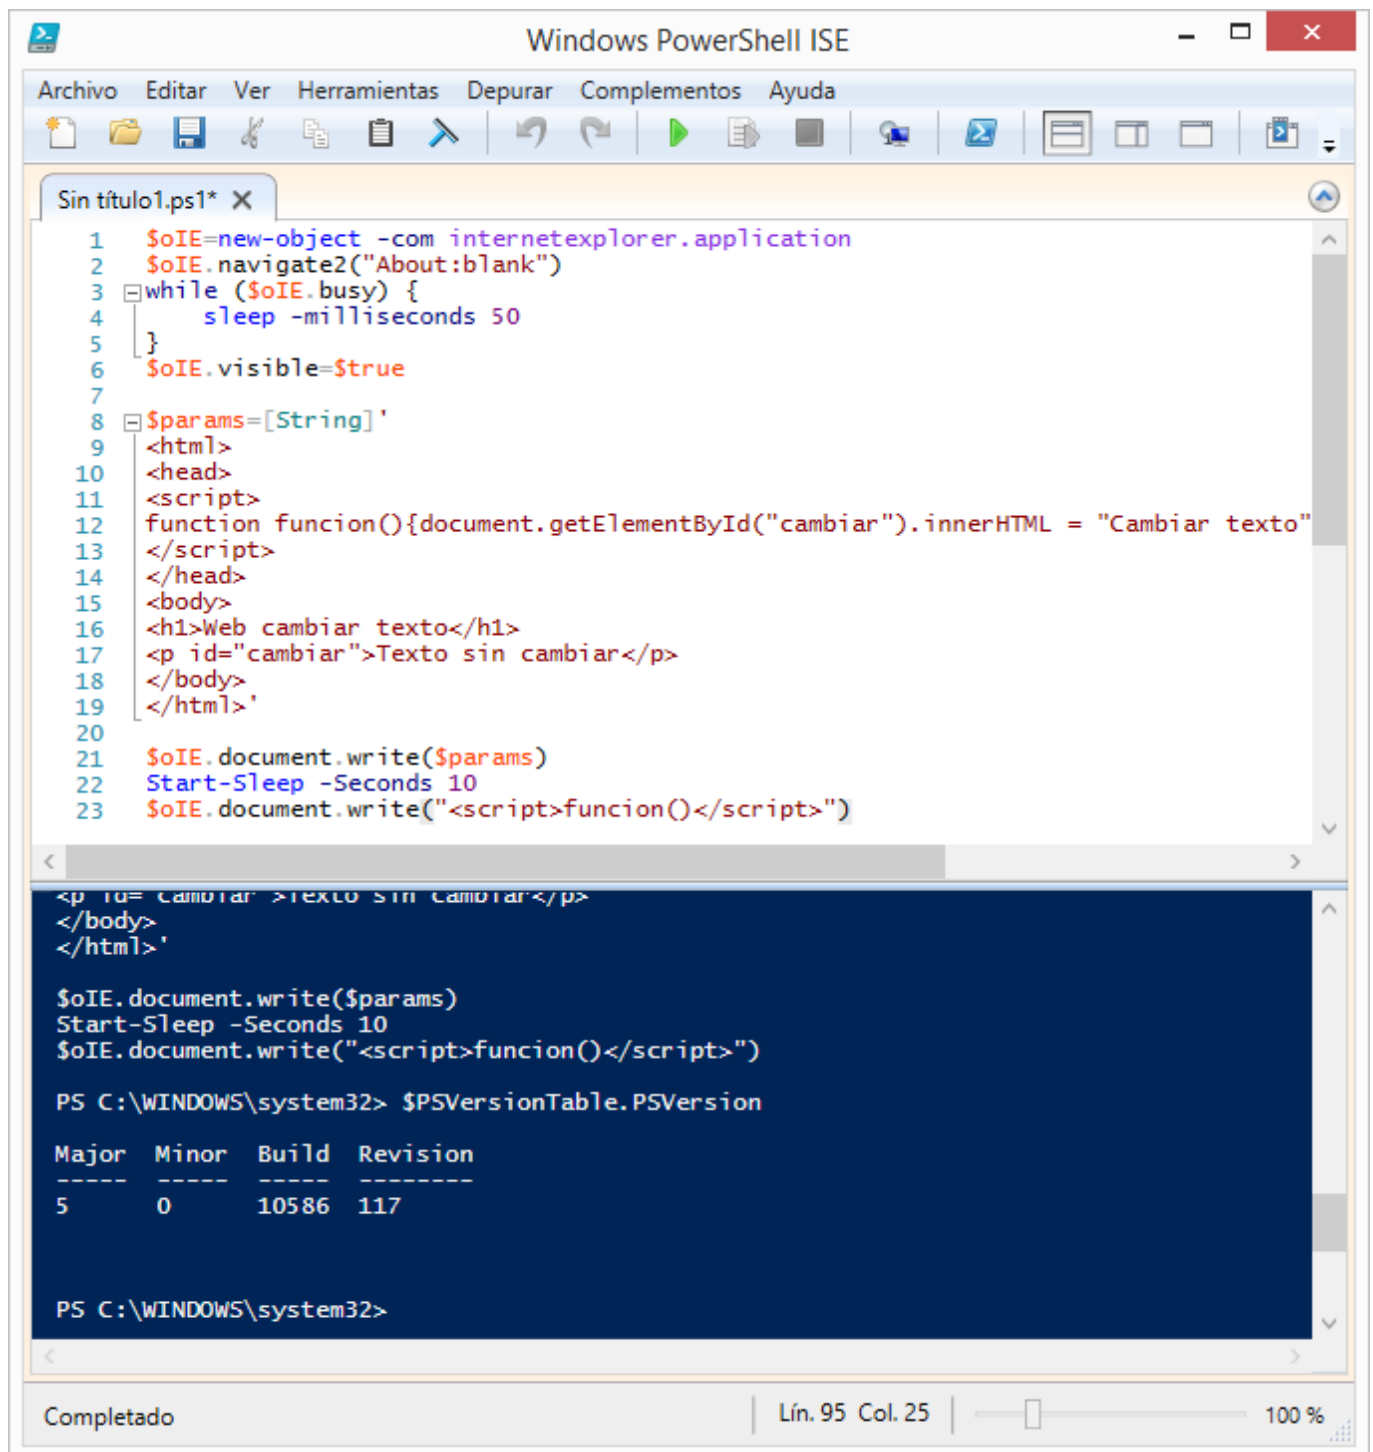

The screenshot shows the Windows PowerShell ISE interface. The main editor window displays a PowerShell script with the following content:

```
1 $oIE=new-object -com internetexplorer.application
2 $oIE.navigate2("About:blank")
3 while ($oIE.busy) {
4     sleep -milliseconds 50
5 }
6 $oIE.visible=$true
7
8 $params=[String]'
9 <html>
10 <head>
11 <script>
12 function funcion(){document.getElementById("cambiar").innerHTML = "Cambiar texto"
13 </script>
14 </head>
15 <body>
16 <h1>Web cambiar texto</h1>
17 <p id="cambiar">Texto sin cambiar</p>
18 </body>
19 </html>'
20
21 $oIE.document.write($params)
22 Start-Sleep -Seconds 10
23 $oIE.document.write("<script>funcion()</script>")
```

The bottom console window shows the output of the script execution, including the HTML content written to the page and the PowerShell version information:

```
<p id= "cambiar" >texto sin cambiar</p>
</body>
</html>'

$oIE.document.write($params)
Start-Sleep -Seconds 10
$oIE.document.write("<script>funcion()</script>")

PS C:\WINDOWS\system32> $PSVersionTable.PSVersion

Major Minor Build Revision
-----
5      0      10586  117

PS C:\WINDOWS\system32>
```

The status bar at the bottom indicates "Completado" (Completed) and shows the cursor position as "Lín. 95 Col. 25" with a zoom level of "100 %".



about:blank



Página en blanco



Web cambiar texto

Cambiar texto