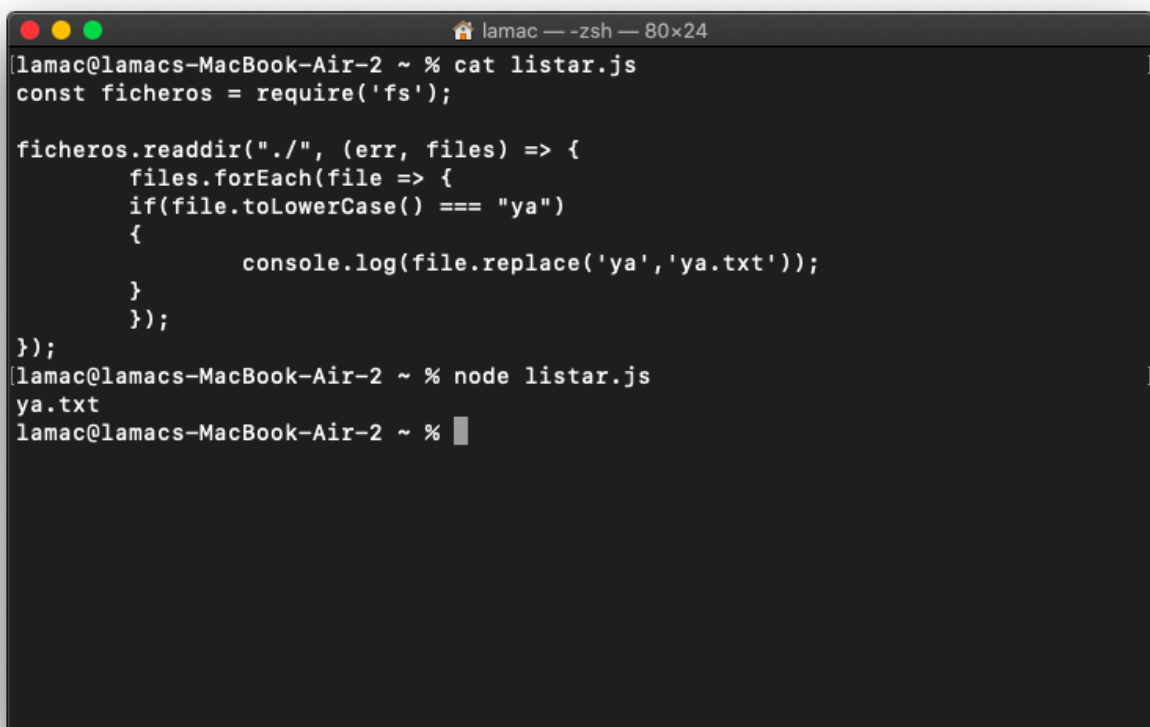


Mostrar el nombre renombrado de un fichero de una lista de ficheros que hay en un directorio con Node.js

[crayon-6a9d4e971f26c421815469/]

A terminal window titled 'lamac — -zsh — 80x24' is shown. The user enters the command 'cat listar.js' and the contents of the file are displayed. The script uses 'fs.readdir' to list files in the current directory and 'file.forEach' to iterate over them. It checks if the file name is 'ya' (case-insensitive) and logs the new name 'ya.txt'. The user then runs 'node listar.js' and the output 'ya.txt' is shown in the terminal.

```
lamac@lamacs-MacBook-Air-2 ~ % cat listar.js
const ficheros = require('fs');

ficheros.readdir("./", (err, files) => {
  files.forEach(file => {
    if(file.toLowerCase() === "ya")
    {
      console.log(file.replace('ya','ya.txt'));
    }
  });
});
lamac@lamacs-MacBook-Air-2 ~ % node listar.js
ya.txt
lamac@lamacs-MacBook-Air-2 ~ %
```