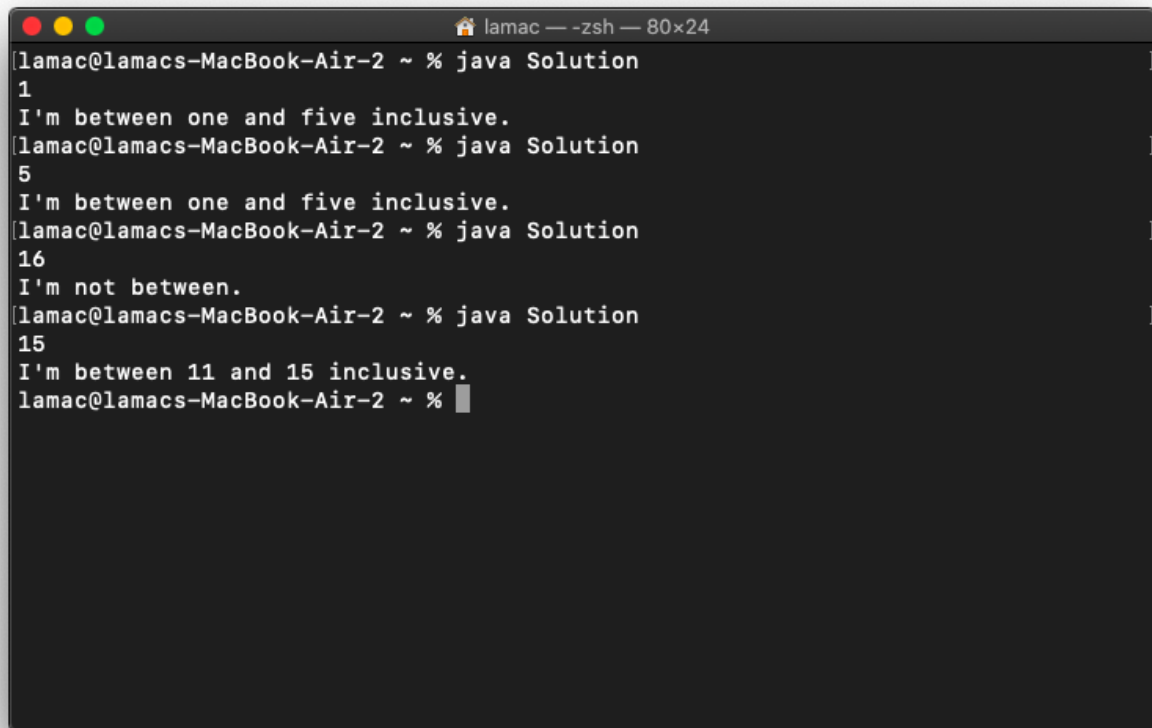


Uso del switch en Java utilizando rangos de valores

[crayon-6a9d4e618fb95598003847/]

A screenshot of a macOS terminal window titled 'lamac — zsh — 80x24'. The terminal shows a series of Java program executions. Each execution starts with a prompt 'lamac@lamacs-MacBook-Air-2 ~ % java Solution' followed by an input value. The program then prints a message based on the value using a switch statement with range-based cases. For inputs 1 and 5, the output is 'I'm between one and five inclusive.' For input 16, the output is 'I'm not between.' For input 15, the output is 'I'm between 11 and 15 inclusive.' The terminal ends with a prompt 'lamac@lamacs-MacBook-Air-2 ~ %' and a cursor.

```
lamac@lamacs-MacBook-Air-2 ~ % java Solution
1
I'm between one and five inclusive.
lamac@lamacs-MacBook-Air-2 ~ % java Solution
5
I'm between one and five inclusive.
lamac@lamacs-MacBook-Air-2 ~ % java Solution
16
I'm not between.
lamac@lamacs-MacBook-Air-2 ~ % java Solution
15
I'm between 11 and 15 inclusive.
lamac@lamacs-MacBook-Air-2 ~ %
```