


Eliminar un fichero utilizando la clase FileInfo desde PowerShell

```
[System.IO.FileInfo]::new("C:\Users\juan\fichero1.txt").Delete()  
( )
```

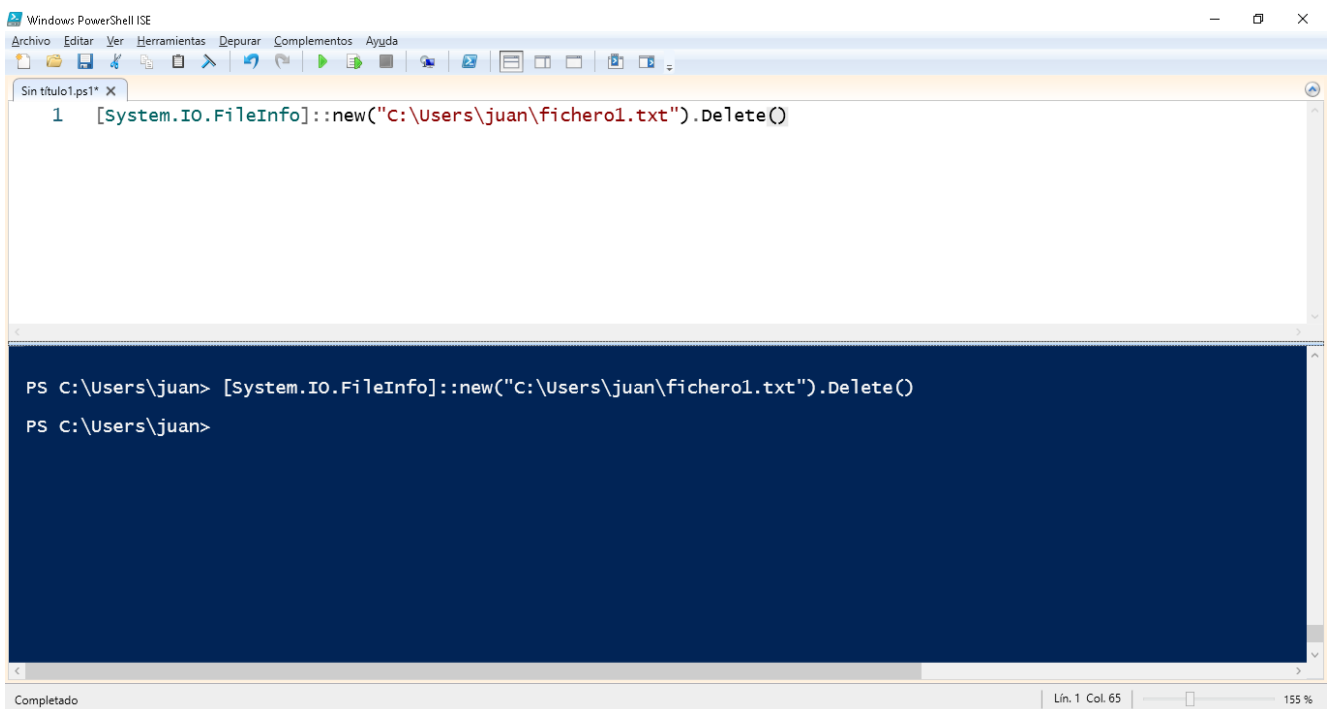

The screenshot shows the Windows PowerShell ISE interface. The title bar reads 'Windows PowerShell ISE'. The menu bar includes 'Archivo', 'Editar', 'Ver', 'Herramientas', 'Depurar', 'Complementos', and 'Ayuda'. The toolbar contains various icons for file operations and development. The editor window, titled 'Sin título1.ps1 * X', contains a single line of PowerShell code: `1 [System.IO.FileInfo]::new("C:\Users\juan\fichero1.txt").Delete()`. The console window at the bottom shows the command being executed: `PS C:\Users\juan> [System.IO.FileInfo]::new("C:\Users\juan\fichero1.txt").Delete()`, followed by the prompt `PS C:\Users\juan>`. The status bar at the bottom indicates 'Completado' (Completed) and shows the current line and column as 'Lín. 1 Col. 65' with a zoom level of '155 %'.