


Usar los parámetros predeterminados en PowerShell

[crayon-6a9d832b6e39d158685176/]

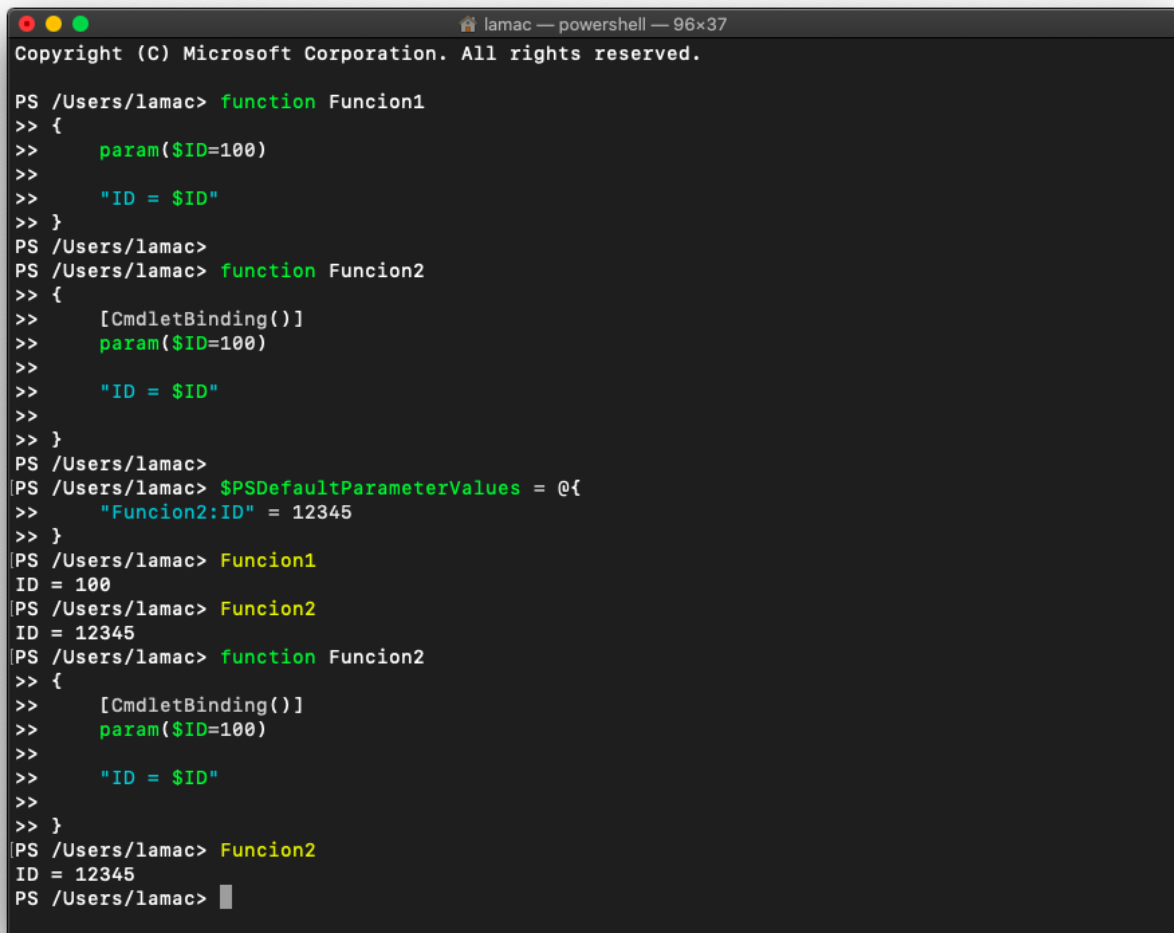

```
Copyright (C) Microsoft Corporation. All rights reserved.

PS /Users/lamac> function Funcion1
>> {
>>     param($ID=100)
>>     "ID = $ID"
>> }
PS /Users/lamac>
PS /Users/lamac> function Funcion2
>> {
>>     [CmdletBinding()]
>>     param($ID=100)
>>     "ID = $ID"
>> }
PS /Users/lamac>
PS /Users/lamac> $PSDefaultParameterValues = @{
>>     "Funcion2:ID" = 12345
>> }
PS /Users/lamac> Funcion1
ID = 100
PS /Users/lamac> Funcion2
ID = 12345
PS /Users/lamac> function Funcion2
>> {
>>     [CmdletBinding()]
>>     param($ID=100)
>>     "ID = $ID"
>> }
PS /Users/lamac> Funcion2
ID = 12345
PS /Users/lamac> 
```