



Listar todos los caracteres ASCII en Bash

```
for (( i=0; i <= 255; i++ )); do printf "\x$(printf %x $i)";  
done
```

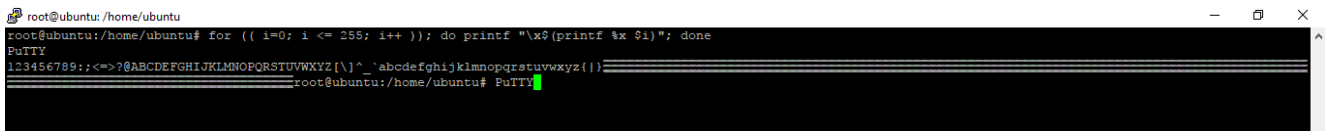

```
root@ubuntu: /home/ubuntu  
root@ubuntu:/home/ubuntu# for (( i=0; i <= 255; i++ )); do printf "\x$(printf %x $i)"; done  
PuTTY  
123456789:;<=>?@ABCDEFGHIJKLMNPOQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~  
root@ubuntu:/home/ubuntu# PuTTY
```

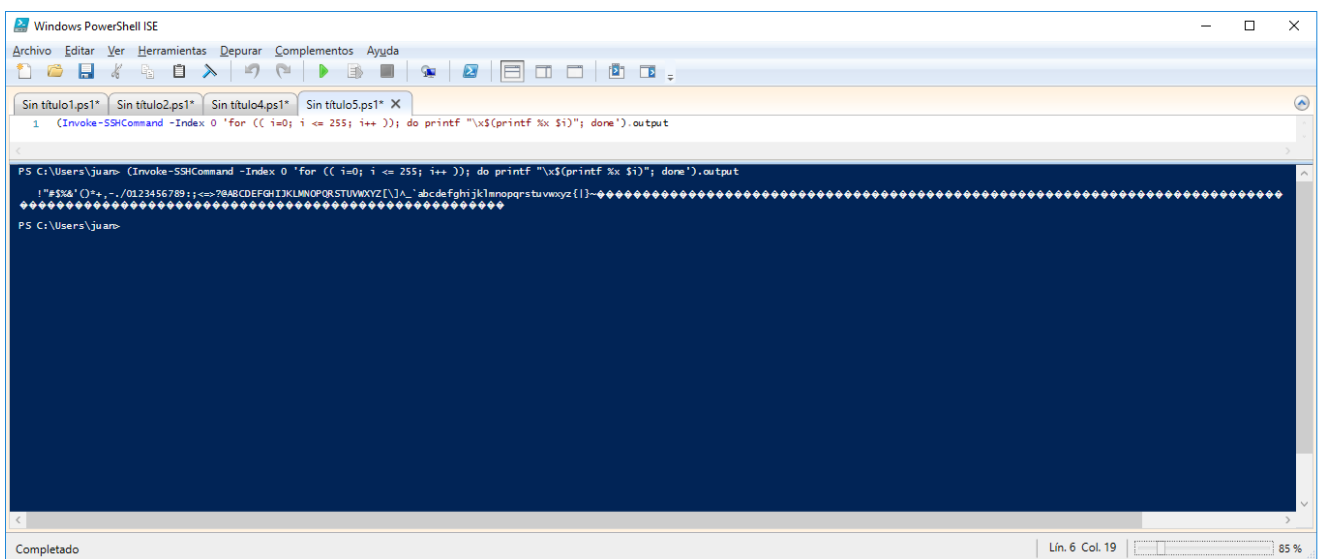

```
Windows PowerShell ISE  
Archivo Editar Ver Herramientas Depurar Complementos Ayuda  
Sin titulo1.ps1* Sin titulo2.ps1* Sin titulo4.ps1* Sin titulo5.ps1* X  
1 (Invoke-SSHCommand -Index 0 'for (( i=0; i <= 255; i++ )); do printf "\x$(printf %x $i)"; done').output  
PS C:\Users\juar~ (Invoke-SSHCommand -Index 0 'for (( i=0; i <= 255; i++ )); do printf "\x$(printf %x $i)"; done').output  
!"#$%&'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNPOQRSTUVWXYZ[\]^_`abcdefghijklmnopqrstuvwxyz{|}~  
PS C:\Users\juar~  
Completado Lin. 6 Col. 19 85 %
```