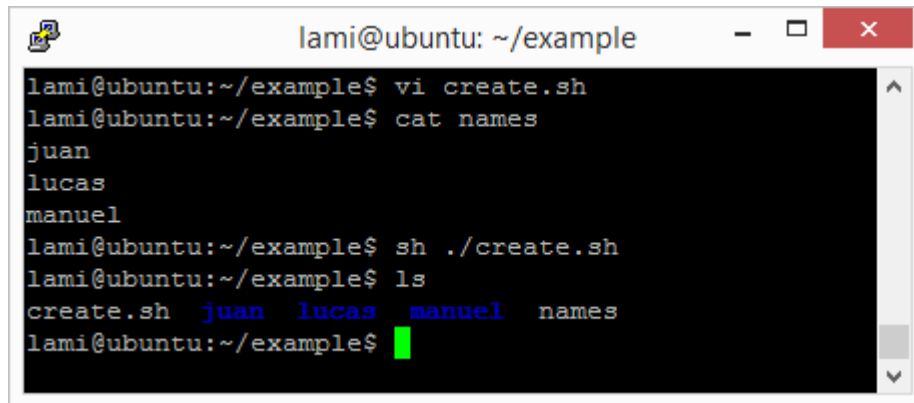


Creating folders for each user (example)

[crayon-6a9d6484d5d7a655597774/]

A terminal window titled 'lami@ubuntu: ~/example' with standard window controls. The terminal shows a series of commands and their outputs. The user runs 'vi create.sh', then 'cat names' which lists 'juan', 'lucas', and 'manuel'. Next, they run 'sh ./create.sh'. Then 'ls' shows 'create.sh', 'juan', 'lucas', 'manuel', and 'names'. Finally, the prompt returns to the shell.

```
lami@ubuntu:~/example$ vi create.sh
lami@ubuntu:~/example$ cat names
juan
lucas
manuel
lami@ubuntu:~/example$ sh ./create.sh
lami@ubuntu:~/example$ ls
create.sh  juan  lucas  manuel  names
lami@ubuntu:~/example$
```