


Autostart-Programme auflisten

[crayon-6a9d4ef2c1ece316117892/]

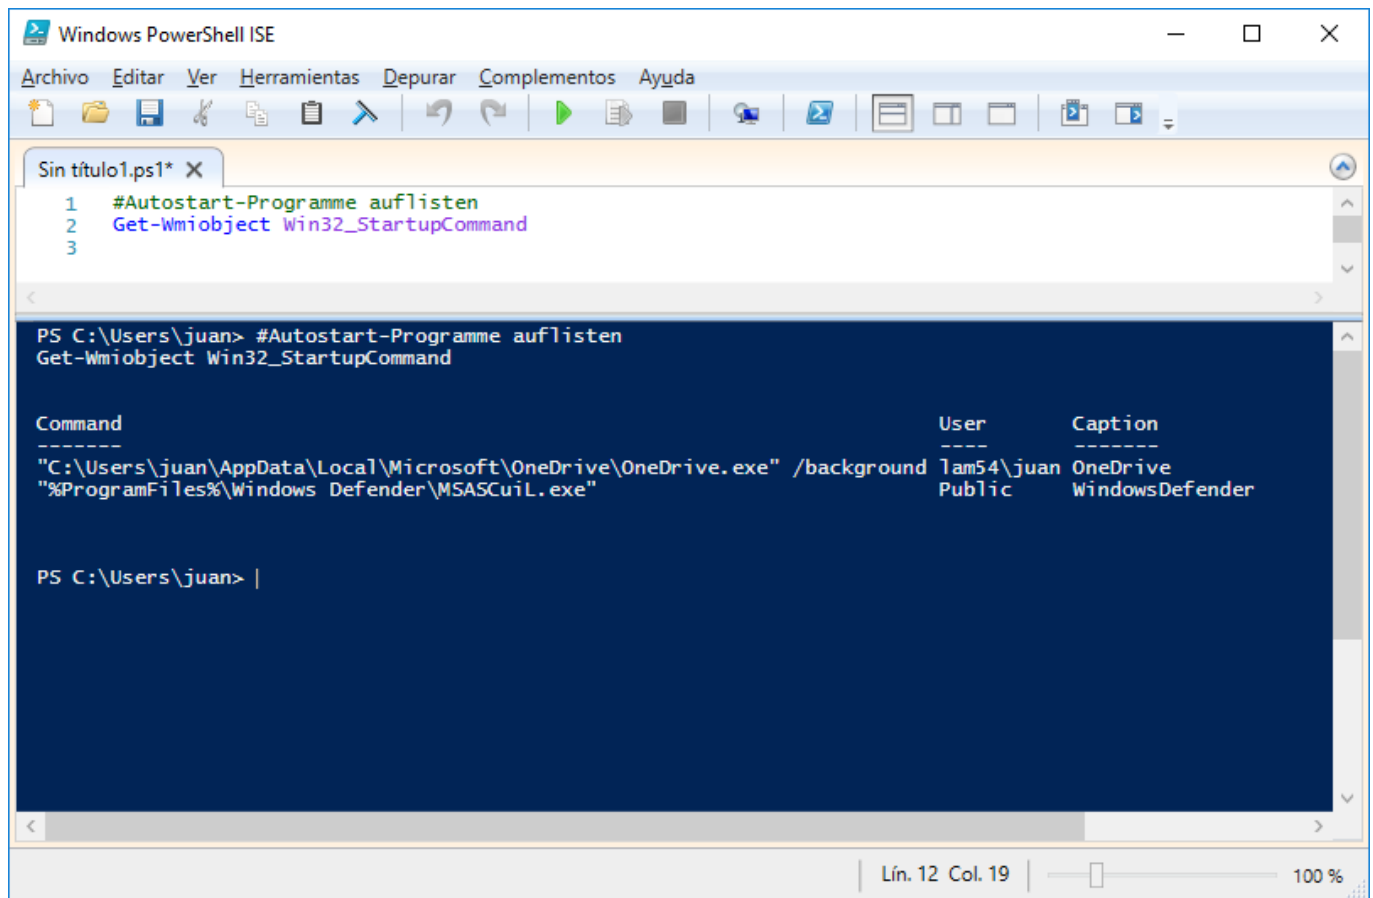

The screenshot shows the Windows PowerShell ISE interface. The menu bar includes 'Archivo', 'Editar', 'Ver', 'Herramientas', 'Depurar', 'Complementos', and 'Ayuda'. The toolbar contains various icons for file operations and execution. A single tab titled 'Sin título1.ps1*' is open. The script editor contains the following code:

```
1 #Autostart-Programme auflisten
2 Get-Wmiobject Win32_StartupCommand
3
```

The console window shows the execution of the command. The prompt is 'PS C:\Users\juan>'. The command entered is '#Autostart-Programme auflisten' followed by 'Get-Wmiobject Win32_StartupCommand'. The output is a table with three columns: 'Command', 'User', and 'Caption'.

Command	User	Caption
"C:\Users\juan\AppData\Local\Microsoft\OneDrive\OneDrive.exe" /background	1am54\juan	OneDrive
"%ProgramFiles%\Windows Defender\MSASCuiL.exe"	Public	WindowsDefender

The status bar at the bottom indicates 'Lín. 12 Col. 19' and a zoom level of '100 %'.