


Startkonfiguration auslesen

[crayon-6a9d5111ae29a776537640/]

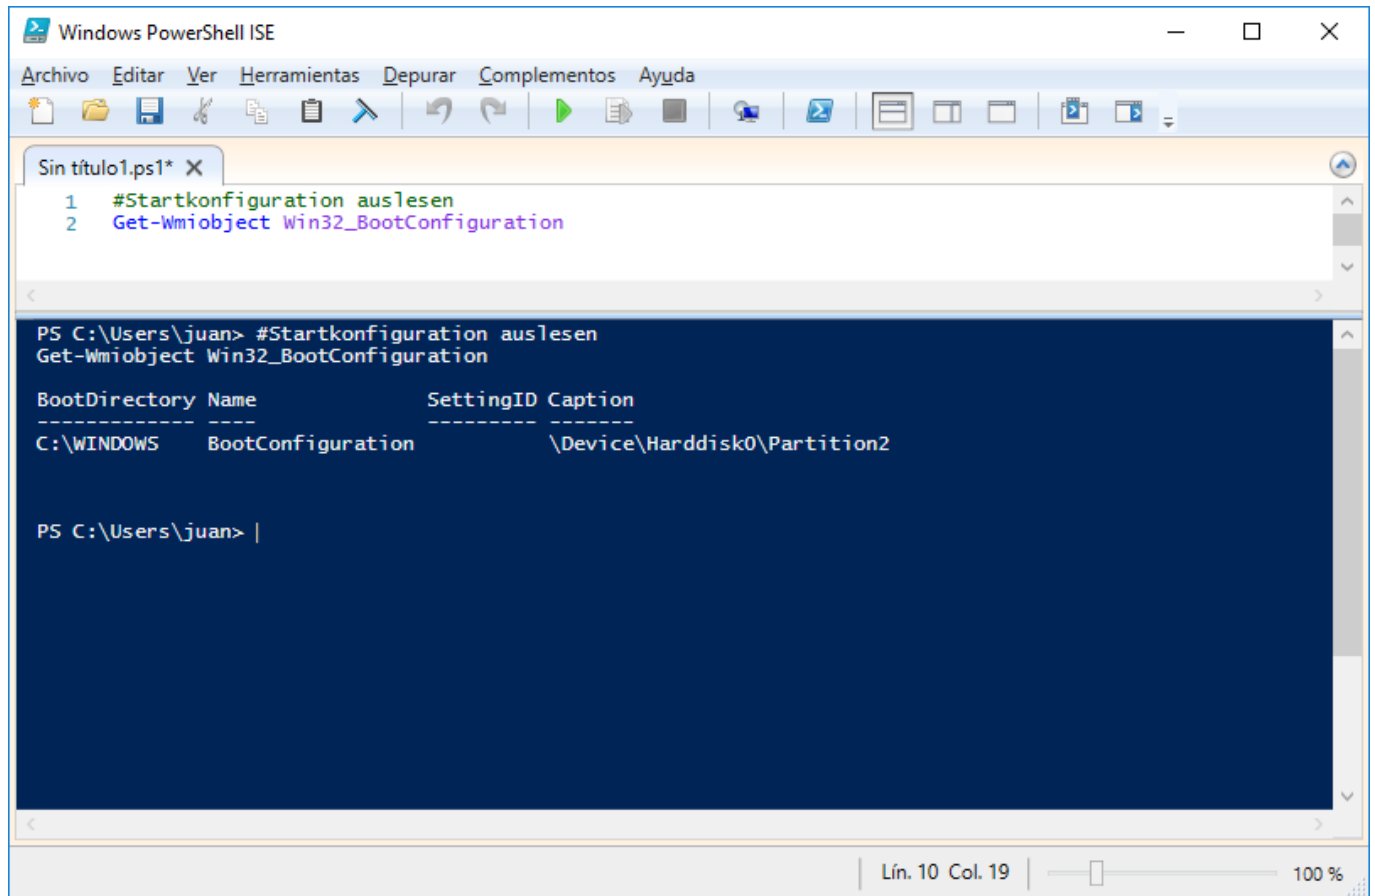

The screenshot shows the Windows PowerShell ISE interface. The menu bar includes 'Archivo', 'Editar', 'Ver', 'Herramientas', 'Depurar', 'Complementos', and 'Ayuda'. The toolbar contains various icons for file operations and execution. The editor window, titled 'Sin título1.ps1* X', contains two lines of code: a comment '#Startkonfiguration auslesen' and the command 'Get-Wmiobject Win32_BootConfiguration'. The console window shows the command being executed, followed by a table of results.

```
PS C:\Users\juan> #Startkonfiguration auslesen
Get-Wmiobject Win32_BootConfiguration
```

BootDirectory	Name	SettingID	Caption
C:\WINDOWS	BootConfiguration		\Device\Harddisk0\Partition2

```
PS C:\Users\juan> |
```

The status bar at the bottom indicates 'Lín. 10 Col. 19' and a zoom level of '100 %'.